

Acusti-Top® Adhesive



Description

Acusti-Top® Adhesive is an acrylic copolymer used to bond Acusti-Top® Floor Underlayment to concrete or gypsum subfloors. This adhesive requires no mixing or dilution. It is ready to apply directly from the pail.

Features

- Pressure sensitive adhesive
- Aggressive dry tack
- Excellent adhesion to difficult-to-bond substrates
- Good surface wet-out
- Exhibits early tack

Where to Use

Application


All types of Construction

Subfloor

All interior subfloors

Technical Characteristics

Nonvolatile:	55 – 57%
pH:	6.5 – 7.8
Weight:	8.5 – 8.7 US lbs/gal (1.0 Kg/L)
VOC:	1 g/L
Packaging:	4 Gal (15.14 L) pail
Coverage:	1,000 ft ² (92.9 m ²) / pail
Material:	Carboxylated acrylic copolymer

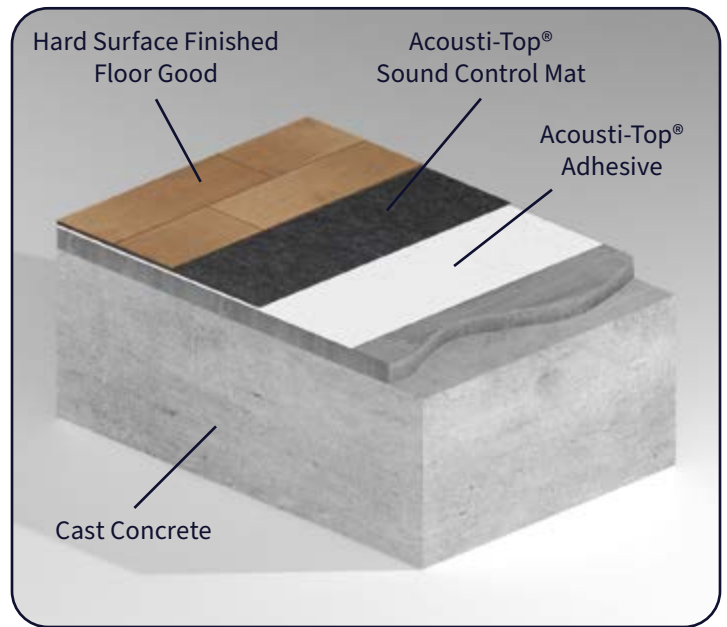

Revised: 2025-04-30