


AlphaSorb® Acoustic Foam Wave Ceiling Baffle

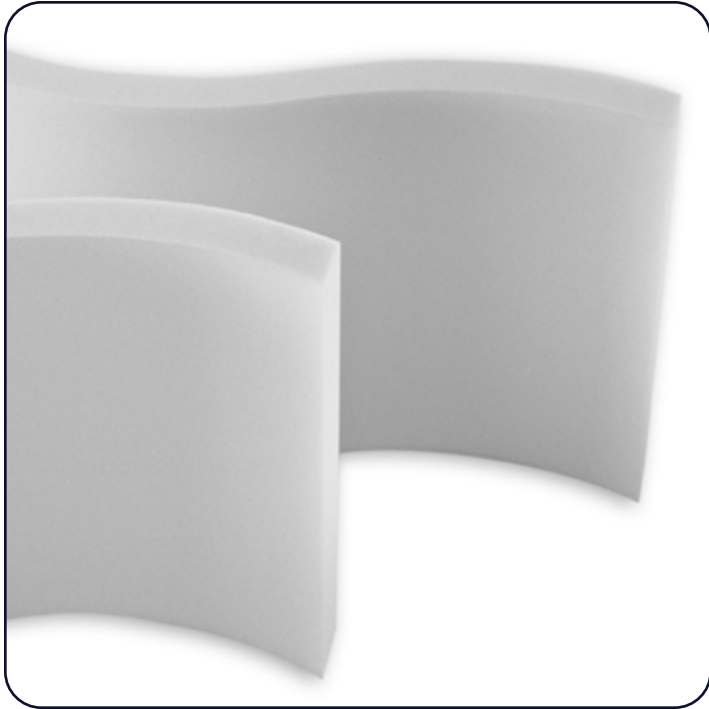

Description

Our AlphaSorb® Acoustic Foam Wave Ceiling Baffles reduce echo and reverberation to improve speech intelligibility while providing an attractive architectural aesthetic. Curved geometry provides exceptional acoustical performance and sparks immediate visual interest. Our baffles create a visually pleasing, acoustically enhanced environment, greatly improving speech intelligibility and promoting a comfortable acoustical profile within the space.

These baffles give you one uniform look to a treated ceiling and are ideal for any application where sound absorption and aesthetics are considerations. They are available in natural grey and white or coated with a non-bridging paint (call for details). AlphaSorb® Acoustic Foam Wave Ceiling Baffles easily mount to ceilings with included corkscrews.

Technical Characteristics

Size:	24" x 48"
Thickness:	2"
Material:	Open-cell melamine foam core
Finish:	Natural Gray or Natural White
Density:	Gray: 0.56 +/- 0.09 lb/ft ³ White: 0.47 +/- 0.13 lb/ft ³
Service Temp:	-40° F to 350° F
Fire Resistance:	Class 1 per ASTM E 84
Colors:	Natural Grey Natural White White Noise Hushed Grey Pitch Black

Benefits

- Absorbs and reduces noise
- Very low-density/lightweight
- Excellent thermal properties
- Class A fire-rated (ASTM E 84)
- Easy to install

Uses and Applications

- Worship Facilities
- Educational Institutions
- Auditoriums
- Bars and Restaurants
- Healthcare Facilities

Sound Absorbing Performance

Finish	Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
Natural White	2"	0.17	0.50	1.11	1.04	1.03	1.04	0.90

Per ASTM C423-17; Type "J" Mount

Revised: 2025-04-30