



# AlphaSorb® Anechoic Foam

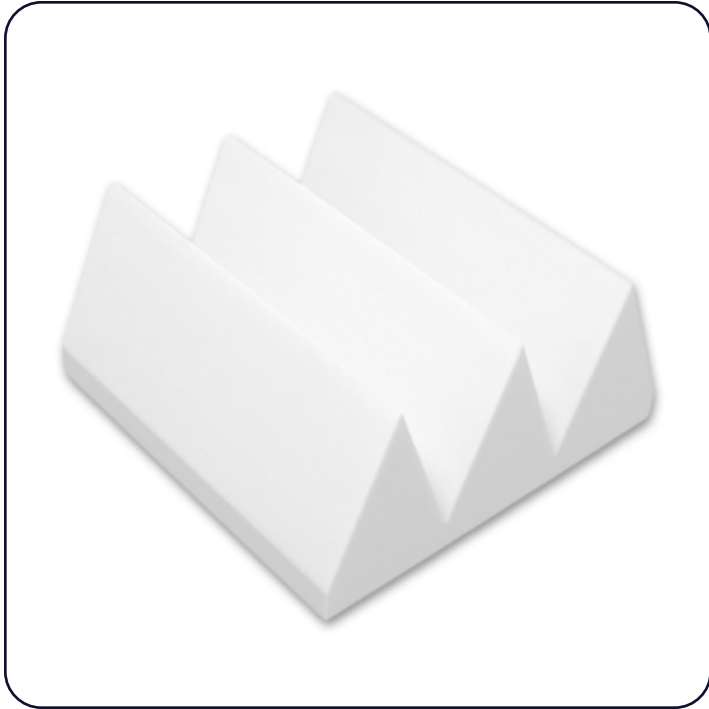

## Description

AlphaSorb® Anechoic Foam provides maximum absorption and is ideal for testing rooms, research facilities and anechoic chambers. Anechoic Foam can dramatically improve the accuracy of sound measurements by eliminating bounce-back sounds such as echo, feedback and resonance.

The deep wedge pattern offers maximum absorption and increased mid to low frequency response. The bold, geometric design of this 3-point wedge may be applied in a variety of patterns to create visual interest and maximize the acoustical performance. Lightweight and easy to install, the anechoic wedges are the perfect solution to your demanding sound absorption applications.

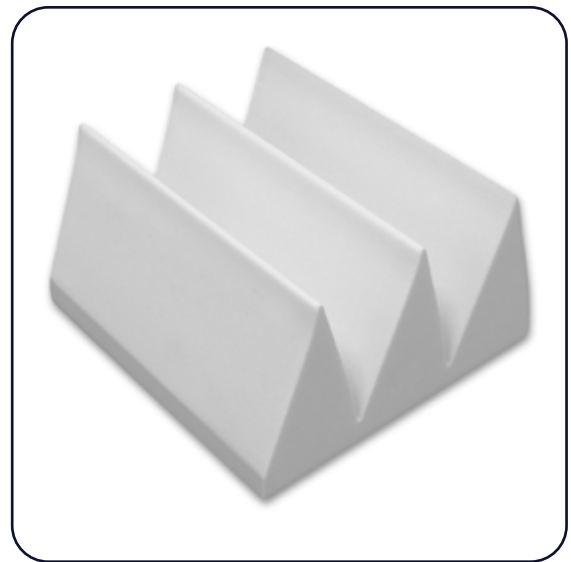

## Technical Characteristics

<b>Size:</b>	1' x 1'
<b>Thickness:</b>	6", 8"
<b>Material:</b>	Open-cell melamine based foam
<b>Density:</b>	0.56 +/- 0.09 lb/ft <sup>3</sup> (Grey) 0.47 +/- 0.13 lb/ft <sup>3</sup> (White)
<b>Color:</b>	Natural Grey, Natural White
<b>Fire Rating:</b>	Class 1 or A per ASTM E84

### Sound Absorbing Performance

Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
6"	0.58	1.09	1.34	1.31	1.32	1.34	1.25
8"	0.67	1.17	1.45	1.14	1.42	1.36	1.35

Type "A" Mount

Revised: 2025-04-30