

AlphaSorb® Designer Premium Acoustic Felt Ceiling Tiles



Description

Available in several styles and colors to add interest and sound absorption to your drop ceiling grid system. Use standard tiles on the perimeter, around vents, and anywhere there are sprinkler heads or motion sensors. Use molded tiles to create variation and dimension in your space.

Features

- Drops in existing grid systems. Increased durability with installation into existing grid systems
- Flexible materials increase durability
- Made from 100% non-woven PET fibers.; up to 50% of the material is recycled
- No dust during installation
- Mold & Mildew resistant
- Stain-resistant and washable
- Designed, engineered, and manufactured in the US
- Multiple shapes available
- 2'x2' drop ceiling grid application

Technical Characteristics

Materials:

Needle punched PET (Polyethylene Terephthalate) fiber, compressed into semi-rigid products

Colors:

Pale Grey | Raven Black | Smokey Grey | Snow White

Fire Resistance:

E84 Class A Fire and Smoke

Size:


23¾" x 23¾"

Thickness:

¼" Tegular — ¼" | 1" Tegular — 1"
Dimensional Sphere — ¼"-3"
Dimensional Wave — ¼"-2"
Recessed Round — 3" below grid + 1" above grid

NRC:

0.75 (Standard Tiles)

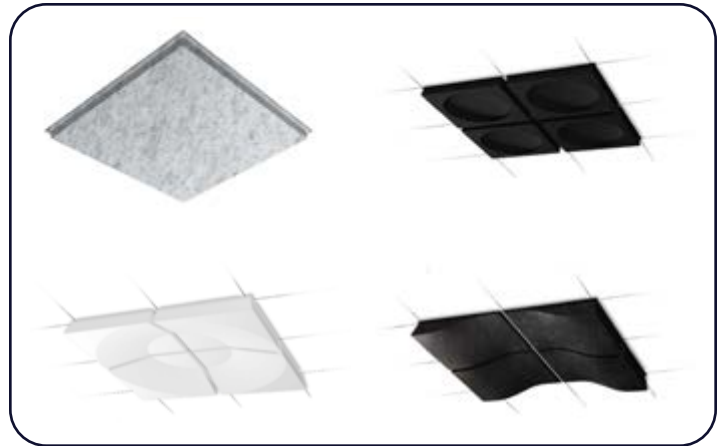

Sound Absorbing Performance

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
0.03	0.90	0.60	0.67	0.80	0.81	0.75

Standard Tiles

Revised: 2025-04-30