


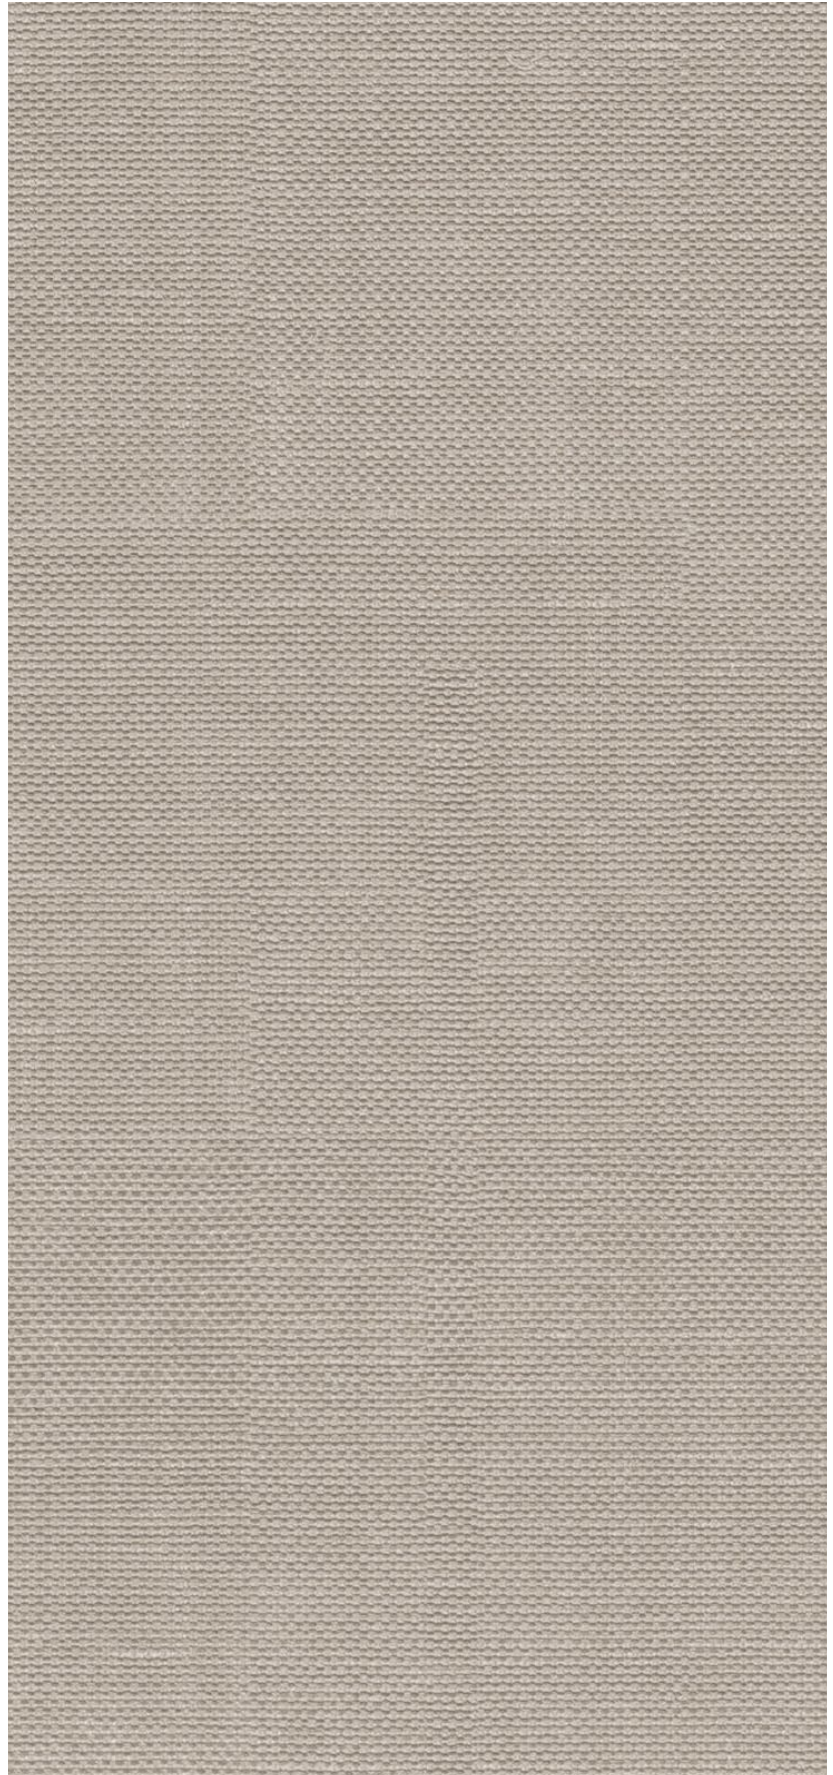


USES


Panels
Upholstered Walls
Upholstery
Wallcovering
Xorel Artform

CONTENTS


100% Xorel®
(85% Biobased PE, 15% PE)



812



814



813



815



834



800



835




836



837




808



839



840



803




831



818



805



841



820



819




823



830



808




806




807




817



810




811



809



845




844




846



847



843



842




848



849



850



852



851

USES	Panels, Upholstered Walls, Upholstery, Wallcovering, Xorel Artform
BACKING/WIDTH	Unbacked 56 in / 142 cm Acrylic 54 in / 137 cm X-Protect™ Sit 54 in / 137 cm X-Protect™ Wall 52 in / 132 cm
CONTENTS	100% Xorel® (85% Biobased PE, 15% PE)
FLAME RETARDANCY	ASTM E84 Class A / Class 1 Fabric meets Underwriters Laboratories (UL) 1286 Flammability Requirements for Office Furnishings California Technical Bulletin 117-2013 Canadian ULC S102
DURABILITY	No wear 1 million double rubs*
ECO INFO	Cradle to Cradle Certified™ Gold Cradle to Cradle Material Health Platinum Certification LEED Compliant Living Product Certified Imperative Level SCS Indoor Advantage™ Gold USDA Certified Biobased Product Mindful Materials Free of PVC, chlorine, plasticizers, heavy metals, ozone-depleting chemicals No topical finishes Extremely low VOCs, Antimicrobial, Safely Disposable Responsible Return Program 85% Biobased content derived from rapidly renewable plant based resources, TUV Austria OK biobased - Level 4 (ASTM D6866)
ACOUSTICS	NRC of 0.9 when wrapped around a 2" thick panel Test Method ASTM C 423
CLEANING CODES	WS & BC - Water/Solvent & Bleach Cleanable
NOTES	X-Protect: Proprietary Xorel backing technology which prevents stains and moisture from passing through the textile enabling the wall or seating surface to be aggressively cleaned. A summary of the results of 65 independent tests on Xorel is available at carnegiefabrics.com

*Results above 100,000 double rubs have not been shown to be a reliable indicator of increased fabric lifespan

LEARN MORE



800.727.6770

carnegiefabrics.com


6423/SB

