



TECHNICAL DATA SHEET

Revision: January 20, 2020
Supersedes: August 7, 2018
Ref. #: 518327

DRAFT & ACOUSTICAL SOUND SEALANT

SC175

DESIGNED FOR USE ON SOUND-RATED WALL SYSTEMS

OSI® SC175 Draft & Acoustical Sound Sealant is a non-flammable, latex-based sealant specially designed to reduce sound transmissions and drafts in all types of wall systems where a sound-rated assembly is required. Its primary function is to achieve and maintain the specific STC (Sound Transmission Class) value of the system designed. This paintable sealant remains flexible and adheres firmly to wood, metal studs, concrete, gypsum board and most other building materials. It is easy-to-use and cleans up easily with soap and water.

Available As:

Item #	Size	Color
1496542	28 fl oz (828 ml) cartridge	White

FEATURES & BENEFITS

- Designed for Use on Sound-Rated Wall Systems
- Reduces Draft & Sound Transmission
- Tested to UL 1479 and UL 2079
- Tested to ASTM E84
- Stays Permanently Flexible
- VOC Compliant

RECOMMENDED FOR

- Developed primarily for commercial construction utilizing light weight cavity walls and floor systems
- Used for exposed and unexposed applications at perimeter joints, floor and ceiling runners, cutouts in gypsum board, veneer plaster systems and other areas where a sound rated assembly is required
- Sealant can also be applied or buttered around all electrical boxes and outlets, cold air returns, heating and air conditioning ducts and other utility equipment penetrating wall surfaces for increased acoustical performance
- Works well for sealing sill and base plates in residential construction and non-fire rated systems
- SC175 must be applied in accordance with ASTM C919 (Standard Practice for Use of Sealants in Acoustical Applications)
- Non-fire rated and fire rated systems. Refer to UL Fire Resistance Directory for testing details

LIMITATIONS

- Not for use in applications where water immersion is possible or in areas where moisture, frost or condensation can occur
- Do not use in applications requiring temperature resistance greater than 170°F
- Do not use on metals that will corrode. Use around certain metals may cause discoloration to occur such as copper
- Consult with manufacturer of adjoining materials for compatibility, including PVC and CPVC materials
- Not recommended for bonding two non-porous surfaces
- Not recommended for use with polyethylene, polypropylene, polytetrafluoroethylene (PTFE)/Teflon® or nylon

COVERAGE

For a 28 fl. oz. (825 ml) cartridge:

- | | |
|---|---|
| • A 1/4" (6 mm) bead extrudes approximately 86 ft. (26 m) | • A 3/8" (9.5 mm) bead extrudes approximately 38 ft. (12 m) |
|---|---|




TECHNICAL DATA SHEET

Revision: January 20, 2020
Supersedes: August 7, 2018
Ref. #: 518327

TECHNICAL DATA

Sound Transmission Class Values:

Tested: Double layer ½ inch Gypsum, Steel Stud

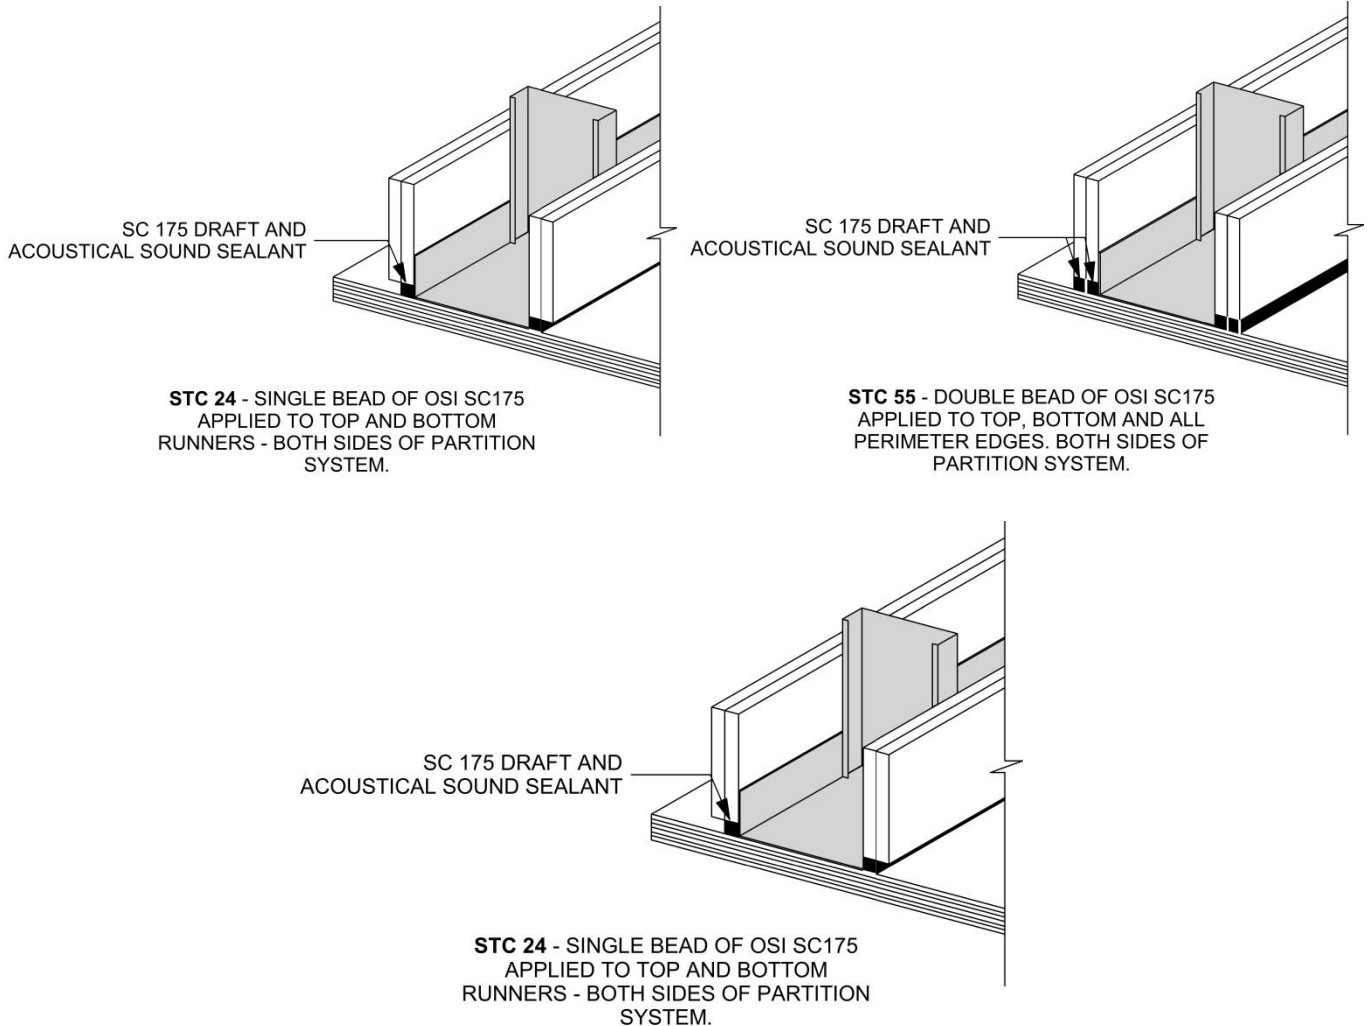

UL Classified as: A material for use as a fill, void or cavity in fire-resistant joint and through-penetration firestop systems

UL SYSTEM DESIGNS

See *UL Online Certifications Directory* (enter keyword: R39255)

JOINT SYSTEMS: FF-S-1047, FW-S-1025

THROUGH PENETRATION FIRESTOP SYSTEMS: C-A-1689, C-AJ-1690, W-J-2345, W-J-3262, and W-L-3444

Design System and Assembly Usage for Specifiers, Users and Purchasers

- The published information cannot always address every construction nuance encountered in the field. It is the user and specifiers responsibility to consult authorities having jurisdiction as to particular requirements covering installation and use of UL Certified products, system designs, and materials. See manufacturers disclaimer.



TECHNICAL DATA SHEET

Revision: January 20, 2020
Supersedes: August 7, 2018
Ref. #: 518327

TECHNICAL DATA

Typical Uncured Physical Properties:

Color:	White	VOC Content:	<1.0% by weight CARB
Appearance:	Non-slumping paste		45 g/l SCAQMD rule 1168
Base:	Synthetic latex rubber	Shelf Life:	24 months from date of manufacture (unopened)
Odor:	Mild acrylic odor	Lot Code	YYDDD
Specific Gravity:	1.59	Explanation	YY= Last two digits of year of manufacture DDD= Day of manufacture based on 365 days in a year
Flashpoint:	Not Applicable		
Freeze/Thaw Stability	3 Freeze/Thaw Cycles Unaffected by freezing once cured	Example:	18061 = 61 st day of 2018 = March 2, 2018

Typical Application Properties:

Application Temperature:	Above 40°F (4°C)	
Open/Tooling Time	15 minutes*	
Tack-free Time:	30 minutes	
Cure Time:	2-7 days or longer*	* Cure time is dependent on temperature, humidity and depth of sealant applied
Sag or Slump:	0.10 inches	ASTM D2202

Typical Cured Performance Properties:

Color:	White	
Service Temperature:	-5°F (-21°C) to 170°F (77°C)	
Water Resistant:	Yes	
Paintable:	Yes, after 24 hours	
Surface Burning Characteristics:	Flame Spread Index: 0 Smoke Development: 0	ASTM E 84 Inorganic reinforced cement board
Sound Transmission Class:	Unsealed partition: STC = 15 Single bead of sealant used at top and bottom runners only – both sides of partition system: STC = 24 Single bead of sealant used at top, bottom and perimeter joints – both sides of system: STC = 45 Double Bead of Sealant used at top, bottom, and all perimeter edges - both sides of partition system: STC = 55	ASTM E 90
Low Temperature Flexibility After Artificial Weathering:	Pass with no cracking or adhesion loss	ASTM C734
Consistency Test:	300	ASTM D217
180° Peel Adhesion:		ASTM C794
Aluminum:	10.0 pli	7day cure @ 73°F & day cure @ 122°F
Wood:	8.0 pli	



TECHNICAL DATA SHEET

Revision: January 20, 2020
Supersedes: August 7, 2018
Ref. #: 518327

TECHNICAL DATA

Specifications:

UL File Number R39255



FILL, VOID OR CAVITY MATERIAL
FOR USE IN THROUGH-PENETRATION FIRESTOP
SYSTEMS & JOINT SYSTEMS
SEE UL FIRE RESISTANCE DIRECTORY
Control No. # R39255

Tested to or conforms to:

- ASTM C834 – Standard Specification for Latex Sealants
- ASTM E84, Class A – Standard Test Method for Surface Burning Characteristics of Building Materials (Tested at UL under research project)
- ASTM E90 – Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements
- ASTM C919 – Standard Practice for Use of Sealants in Acoustical Applications
- ASTM D217 – Standard Test Methods for Cone Penetration of Lubricating Grease
- UL 1479 – Standard for Fire Tests of Penetration Firestops
- UL 2079 – Standard for Tests for Fire Resistance of Building Joint Systems
- GreenGuard® Certified

DIRECTIONS

Tools Typically Required:

Utility knife, caulking gun and tool to puncture inside seal of cartridge.

Safety Precautions:

Wear gloves.

Preparation:

The temperature of the product, the surfaces and the working area must be above 40°F (4°C). For best performance, apply sealant at 70°F (21°C). Ensure surfaces to be sealed are clean, dry, structurally sound and free of dust, grease, oil, and other foreign contaminants. Cut off tip of cartridge at a 45° angle to desired bead size (3/8" recommended). Puncture inside seal of cartridge.

Application:

Sealant should be applied as specified in the sound-rated system being installed (either wood or metal studs). Sealant must be applied in accordance with ASTM C 919. Maximum joint size should not exceed 5/8" (15.9 mm) width x 1/2" (12.7 mm) depth. If necessary, sealant can be painted as applicable to meet project requirements after 24 hours.

Bottom and Top Runners:

Apply a continuous 3/8" (9.5 mm) round bead of sealant on runners before setting gypsum board. Press gypsum board firmly into sealant, ensuring complete contact with adjacent materials. Fill joint on top runners to complete the seal. Repeat procedure for double-layer applications.

Cut-Outs and Perimeter Joints:

Backs of electrical boxes, pipes, duct systems and other types of utility equipment penetrating wall surfaces shall be buttered with sealant. Seal all joints at perimeter edges including abutting surfaces and corner joints.

For further application information, refer to ASTM C919 - Standard Practice for Use of Sealants in Acoustical Applications

Clean-up:

Clean tools and uncured adhesive residue immediately with warm water and soap. Cured sealant may be carefully cut away with a sharp-edged tool.

STORAGE & DISPOSAL

DAMAGED BY FREEZING. Store in a cool, dry location at room temperature. For maximum shelf life store at 75°F (24°C). Take unwanted product to an approved household hazardous waste transfer facility. Hardened material may be disposed of with

LABEL PRECAUTIONS

CAUTION! Contains ethylene glycol, mineral spirits, and crystalline silica. May cause skin, eye and respiratory irritation. Avoid contact with eyes and skin. Avoid breathing vapors. Use with adequate ventilation. Do not swallow. **FIRST AID:** If swallowed do not induce vomiting, call a physician or Poison Control center immediately. For eye contact, flush with water for 15 minutes, call a physician. For skin contact, wash thoroughly with soap and water. **KEEP OUT OF REACH OF CHILDREN.**



WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov.

Refer to the Safety Data Sheet (SDS) for further information.



TECHNICAL DATA SHEET

Revision: January 20, 2020
Supersedes: August 7, 2018
Ref. #: 518327

LIMITED WARRANTY

This product is warranted to be free from defects in materials when used as directed. Henkel's sole obligation shall be, at its option, to replace or refund the purchase price of product proven to be defective. Henkel makes no other warranty, express or implied, including warranties of MERCHANTABILITY and FITNESS FOR A PARTICULAR PURPOSE and will not be liable for consequential or incidental damages. This limited warranty gives you specific legal rights, which vary from state to state. Henkel may be contacted at 1.800.624.7767 M-F 9:00 am to 4:00 pm ET for warranty assistance.

DISCLAIMER

The information and recommendations contained herein are based on our research and are believed to be accurate, but no warranty, express or implied, is made or should be inferred. Henkel recommends purchasers/users should test the products to determine acceptable quality and suitability for the intended use. All adhesive/sealant applications should be tested under simulated or actual end use conditions to ensure the adhesive/sealant meets or exceeds all required project specifications. Since assembly conditions may be critical to adhesive/sealant performance, it is also recommended that testing be performed on specimens assembled under simulated or actual production conditions. Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.



OSI Tougher than the Elements. For Professional Use Only. The Battle will be Fierce.

OSI works side by side with residential builders, contractors and remodeling professionals who use our products every day on their jobsites. OSI combines this deep understanding with the sophisticated global innovation and manufacturing excellence of Henkel to make the world's best professional-grade caulks, sealants and adhesives.

For Technical Assistance call: 1-800-624-7767 – Mon-Fri - 9:00a – 4:00p ET
www.ositough.com



OSI Brand is part of the Henkel family of brands. Founded in 1876, Henkel is a global leader in the consumer and industrial businesses. Henkel operates worldwide with leading brands and technologies in three business areas: Laundry & Home Care, Beauty Care and Adhesive Technologies.

Henkel Corporation - Professional & Consumer Adhesives Headquarters - Rocky Hill, CT 06067
www.henkelna.com