


Sonex® Clean Acoustic Panel

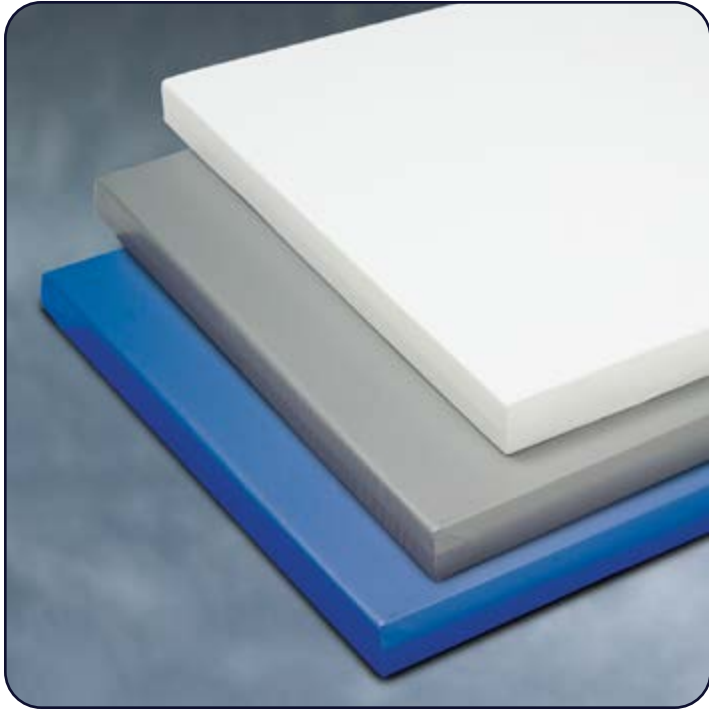

Description

SONEX® Clean wall panels are designed for environments that require noise control with durable, washable and cleanable materials. These are ideal for use in a variety of applications, including bottling and food processing plants, clean rooms and food preparation areas. SONEX® Clean products meet USDA/ FDA requirements.

The products are fully encapsulated in FR taffeta vinyl for efficient cleaning and long, durable life. They offer excellent sound absorption to reduce reverberation or echo.

The SONEX® Clean line is made from Willtec melamine foam core, which is ASTM E84 Class 1 fire-rated. Products are available in 15 standard colors.

These panels are an excellent choice when washable, cleanable and durable sound absorption material is required to reduce reverberation or echo.

Technical Characteristics

Size:	24" x 48"
Thickness:	2"
Material:	Open-cell melamine-based foam core, PVC
FR Taffeta Vinyl:	4.00 mil PVC Film Meets California Fire Marshall Requirements Section 13115 CA Health & Safety
Color:	15 (see Color Chart)
Fire Resistance:	Class 1 per ASTM E84 Meets IL 1715 (Willtec™ Natural)
Mounting:	Attach in seconds to wall and/or ceiling surface with acouSTIC water-based adhesive or hook and loop or other mechanical systems (see installation guide).
NRC:	0.75

Sound Absorbing Performance

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
0.18	0.75	1.21	0.82	0.40	0.25	0.80

Per ASTM C423-07; Type "A" Mount

Revised: 2025-04-30