


Sonex® Contour Ceiling Tile

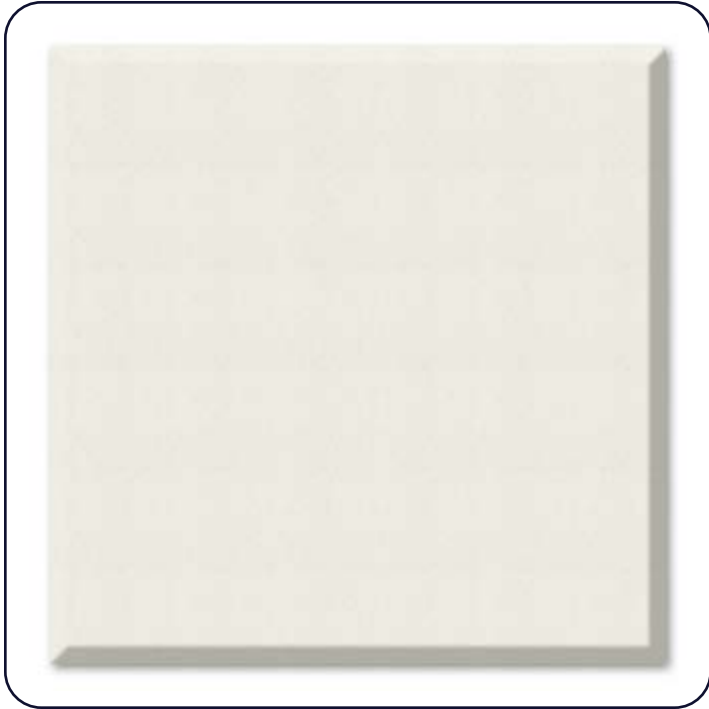

Description

The Sonex® Contour Ceiling Tile combines sound absorption with an eye-pleasing design for applications with existing T-bar suspended grid systems. These ceiling tiles are available in two thicknesses to achieve the desired amount of absorption for your project.

Constructed with Class 1 fire rated acoustical foam and a sag-resistant backer board, the Sonex® Contour Ceiling Tile meets public building code requirements. These ceiling tiles easily install into existing standard 2' x 2' suspended ceiling grid systems. Cross tees may be added when used in a 2' x 4' grid.

Sonex® Contour Ceiling Tiles add sound absorption to any grid system lowering reverberation and echo while improving speech intelligibility.



Technical Characteristics

| | |
|-------------------------|---|
| Size: | 2' x 2' |
| Thickness: | 1 3/8" 2 1/8" |
| Material: | Open-cell melamine-based foam backed with 3/8" backer board |
| Finish: | HPC Coated |
| Color: | Arctic White |
| Pattern: | Basix |
| Fire Resistance: | Class 1 per ASTM E84 |
| Mounting: | Drops into existing T-bar ceiling grid |
| NRC: | 0.95 (1 3/8") 1.20 (2 1/8") |

Sound Absorbing Performance

| Thickness | 125 Hz | 250 Hz | 500 Hz | 1000 Hz | 2000 Hz | 4000 Hz | NRC |
|-----------|--------|--------|--------|---------|---------|---------|------|
| 1 3/8" | 0.63 | 0.54 | 0.81 | 1.24 | 1.30 | 1.36 | 0.95 |
| 2 1/8" | 0.43 | 0.73 | 1.18 | 1.44 | 1.44 | 1.54 | 1.20 |

Revised: 2025-04-30