


Sonex[®] Contour Panel

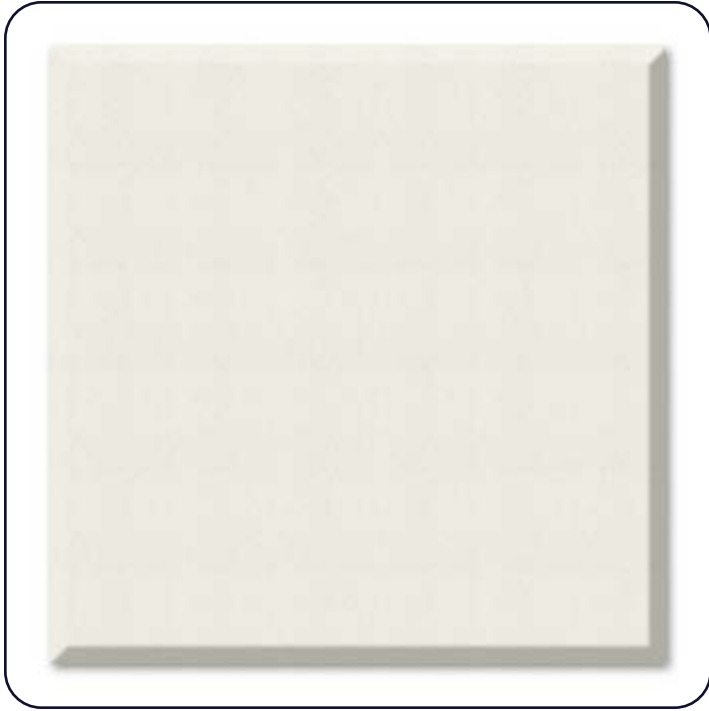

Description

The Sonex[®] Contour Panel combines sound absorption with an eye-pleasing design for direct mount wall or ceiling applications.

With two available thicknesses, you can achieve the desired amount of absorption for your project. These are constructed of a Class 1 fire rated acoustical foam that meets public building code requirements.

Sonex[®] Contour Panels easily adds sound absorption to any room, lowering reverberation and echo while improving speech intelligibility.

Technical Characteristics

Size:	2' x 2'
Thickness:	1" 1¾"
Material:	Open-cell melamine-based foam
Finish:	HPC Coated
Color:	Arctic White
Pattern:	Basix
Fire Resistance:	Class 1 per ASTM E84
Mounting:	Attach to a wall and/or ceiling surface with a water-based construction adhesive
NRC:	0.65 (1") 0.90 (1¾")



Sound Absorbing Performance

Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1"	0.12	0.24	0.59	0.89	0.96	0.99	0.65
1¾"	0.21	0.48	0.93	1.09	1.09	1.04	0.90

Per ASTM C423-90; Type "A" Mount

Revised: 2025-04-30