


AlphaSorb® Paintable Ceiling Tiles



Description

Our AlphaSorb® Paintable Acoustic Ceiling Tile provides a blank canvas in a finish similar to drywall ready to accept any number of paint colors for endless design possibilities. This paintable drop in ceiling tile is the best choice for projects requiring a soft white appearance or when a specific color is desired.

The AlphaSorb® Paintable Acoustic Ceiling Tile has a high-density, acoustical fiberglass core, offering excellent acoustical performance. Paintable tiles are available in 2' x 2' or 2' x 4' sizes to fit into standard T-bar suspended ceiling systems. The acoustical ceiling tiles may be installed as white panels or be painted on location in any color you desire. Spray Painting this product is best done with a non-bridging acrylic paint.

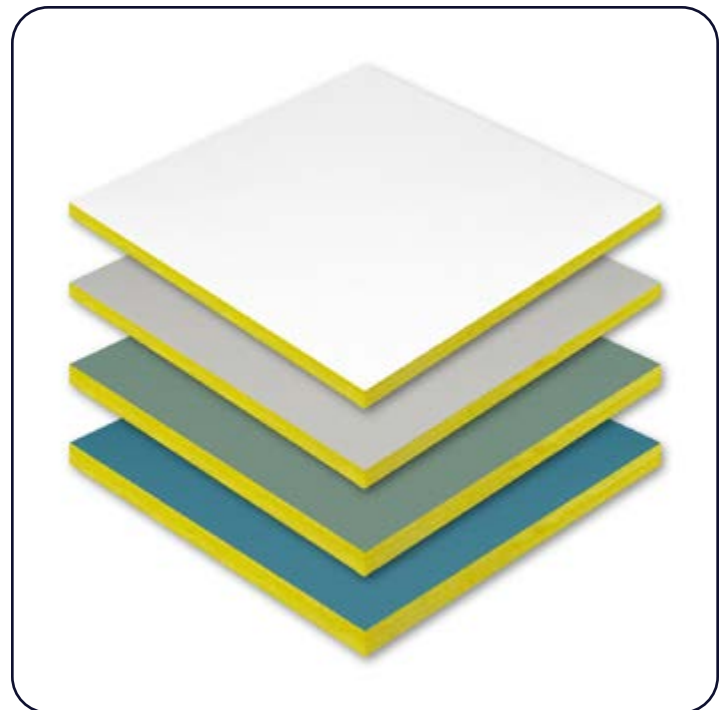

Technical Characteristics

Size (nominal):	2' x 2' 2' x 4'
Thickness:	1" 2"
Density:	6-7 lb./cu. ft. fiberglass board
Finish:	Paintable Fabric
Edge Detail:	Square Natural Edge
Mounting	Drop into existing T-bar grid
Fire Rating:	Class 1 or A per ASTM E84
NRC:	0.95 (1") 0.95 (2")

Sound Absorbing Performance

Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1"	0.80	0.89	0.82	0.96	1.03	1.10	0.95
2"	0.80	0.83	0.99	1.04	1.02	0.98	0.95

Revised: 2025-04-30

E 400 Mount